



AMPCONTROL ELECTRIC VEHICLE PACKAGES

ADVANCING BATTERY TECHNOLOGY TO ELECTRIFY UNDERGROUND VEHICLES

Through radical thinking and collaboration, we've developed the world's first IECEx Group 1 certified electric vehicle, using an Intrinsically Safe traction battery.

Ampcontrol IECEx certified electric vehicle drive systems:

- Are available from Ampcontrol as DRIFTEX an overhaul package, developed in collaboration with Solitech
- For new personnel carrier enquiries please contact Ampcontrol to discuss available options

BENEFITS

- No diesel emissions, in particular no Diesel Particulate Matter (DPM) – an identified Group 2A carcinogen
- Supports site environmental emissions reductions and improvements in social licence
- Heat reduction. Less demand on mine site ventilation
- Noise reduction
- IoT capability
- User customisation available
- Fast charging. Flat to full in 10 minutes, a similar time to refuelling a diesel
- Extensive monitoring
- Zone control
- Speed adjustments configurability



WORLD FIRST

**IECEX GROUP I CERTIFIED ELECTRIC
VEHICLE, USING AN INTRINSICALLY
SAFE TRACTION BATTERY**



1300 267 373
AMPCONTROLGROUP.COM



AWARD WINNING

HEALTH

In recognition of the industry-wide health benefits associated with the removal of diesel particulate matter, DRIFTEX has been awarded for Health Excellence at the NSW Mining HSEC Awards in 2023.

INNOVATION

Ampcontrol has been named one of Australia's Most Innovative Companies for 2023 by the Australian Financial Review (AFR) for its advanced Australian manufacturing of energy solutions.

The accolade was attributed to the innovation of DRIFTEX, helping to decarbonise and electrify the mining industry.

CERTIFICATION

Ampcontrol's IECEx Group 1 certified electric vehicle is covered by the following certifications

Item	Protection technique	Certificate number
Intrinsically Safe Battery Module (ISBM)	Ex ia ib	IECEx ExTC 22.0029X
Battery management and interface between the EV Guard and ISBM	Ex ia	IECEx ExTC 22.0028X
Ev guard - battery interface with tripping circuits	Ex ia	IECEx ExTC 22.0027X
Drain for Ex enclosures that contain fluids	Ex d	IECEx ExTC 22.0022U
Enclosure for battery isolation, control and oil cooling pump	Ex d s	IECEx ExTC 21.0006X
Enclosure for motor, guards and dashboard	Ex d s	IECEx ExTC 22.0013X
Enclosure for Foot pedal interface	Ex d	IECEx ExTC 22.0001X

WORLD FIRST

IECEx CERTIFIED INTRINSICALLY SAFE TRACTION BATTERY

Certified to operate and remain in Group I hazardous areas. The battery chemistry is designed to be fundamentally stable and is not susceptible to a thermal runaway. Every cell in the battery pack is continuously monitored even when not in use by an Ex ia BMS to ensure safety.

IECEx Certificate of Conformity	
INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres for rules and details of the IECEx Scheme visit www.iecex.com	
Certificate No.:	IECEx ExTC 22.0029X
Status:	Current
Date of Issue:	2023-09-21
Applicant:	AmpControl SWG Pty Ltd 6 Martin Drive Tomago NSW 2322 Australia
Equipment:	Intrinsically Safe Battery Module ISBM
Optional accessory:	
Type of Protection:	Intrinsic safety 'i'
Marking:	State A : Ex ia I Ma State B : Ex ib I Mb
Approved for issue on behalf of the IECEx Certification Body:	James Bes
Position:	Certification Authority
Signature: (for printed version)	
Date: (for printed version)	
1. This certificate and schedule may only be reproduced in full. 2. This certificate is not transferable and remains the property of the issuing body. 3. The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.	
Certificate issued by: Ex Testing and Certification Pty Ltd 130 Kennington Drive Tomago NSW 2322 Australia	
	
	



1300 267 373

AMPCONTROLGROUP.COM

DRIFTEX

MADE TOUGH FOR TOUGH ENVIRONMENTS

Built from a solid, trusted foundation, DRIFTEX our retrofit package re-uses existing assets and offers several benefits over maintaining existing or purchasing new diesel-powered vehicles.

UPGRADED VEHICLE FEATURES

- Ex ia methane monitor shutdown system
- Extensive system monitoring
- Data logging
- Optional IS WiFi connectivity
- Elimination of diesel particulates
- Lower sound levels dB
- Battery tested to IEC62133-2 for "no fire" and "no explosion"
- IECEx certified battery

PEAK POWER

Constant 4WD with a total peak power of 200kW distributed evenly across rear and front axles

PEAK TORQUE

Maximum tractive effort approx. 4500kg

TOP SPEED

35km/hr at 9,500kg GVM

SAFETY FIRST

BRAKES

- Dual braking systems (redundancy)
- Regenerative braking
- Additional layers of protection on Emergency breaks



PERSONAL IDENTIFICATION SYSTEM

- Safe, secure designated NFC card system



INTRINSICALLY SAFE (IS) HEADLIGHTS

- Exia
- Hi-low beam
- Multiple colours




ELECTRIC VEHICLE CHARGING SOLUTIONS

- DC Fast Charging
- Manufactured by Ampcontrol, incorporating world class Tritium and Danfoss technologies
- Standard industry charging protocol
- DRIFTEX flat to full charge in 10 minutes
- Built for any environment, thriving in temperatures from -35°C to +50°C
- Durable low maintenance design
- CCS2, MCS and mining bespoke connection solutions

Battery electric charging solutions with surface and QDS underground options, from 75kW through to multi megawatt, supplied from 415V AC through to customer specific high voltage options.

Our fixed and relocatable charging solutions offer standard industry charging communication protocol ensuring they're capable of charging your entire electric vehicle fleet.

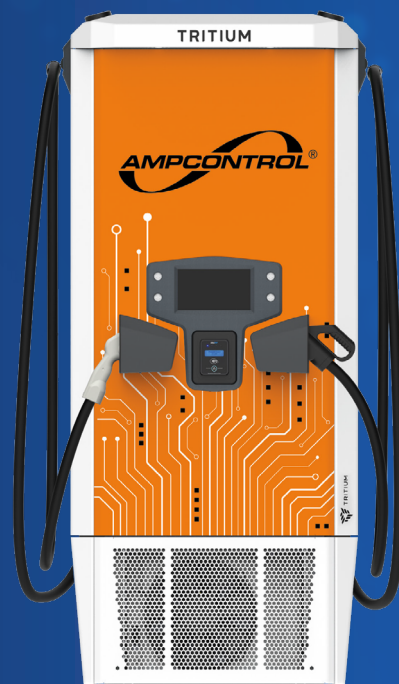

^ Surface charger



QDS underground charger on skid



1300 267 373
AMPCONTROLGROUP.COM

MEGAWATT CHARGING

The next advancement in mine site electrification the Ampcontrol MegaWatt Charger is a dual-mode charger capable of charging at up to powers of one megawatt. Minimising charging time and operational impact.

Consisting of a hybrid power electronic stack capable of delivering up to 500kW through a standard electric vehicle CCS2.0 plug, and up to 1MW through the RADOX MCS1500 plug.

The Ampcontrol MegaWatt Charger can include an isolation transformer to achieve galvanic isolation and be truly standalone.



AMPCONTROL MEGAWATT CHARGER FEATURES

- Ultra fast charging
- Liquid cooled with integral air-to-liquid exchanger
- Safe and biodegradable dielectric coolant
- Both CCS and MCS charging plug options
- Can charge Ampcontrol DRIFTEX from flat to full in 10 minutes
- Includes Ampcontrol Arc Vent solution
- EMC Compliant – Category 4 compliant to EN 61800-3:2004, EMC Directive 2004/108/EC

RADOX MCS1500





1300 267 373
AMPCONTROLGROUP.COM



1300 267 373
AMPCONTROLGROUP.COM