

# Ultima® XIR Gas Monitor


Infrared technology for combustible gas detection



**DURA™  
SOURCE  
TECHNOLOGY**

**10-YEAR  
WARRANTY**

**SIL-2 Certified**

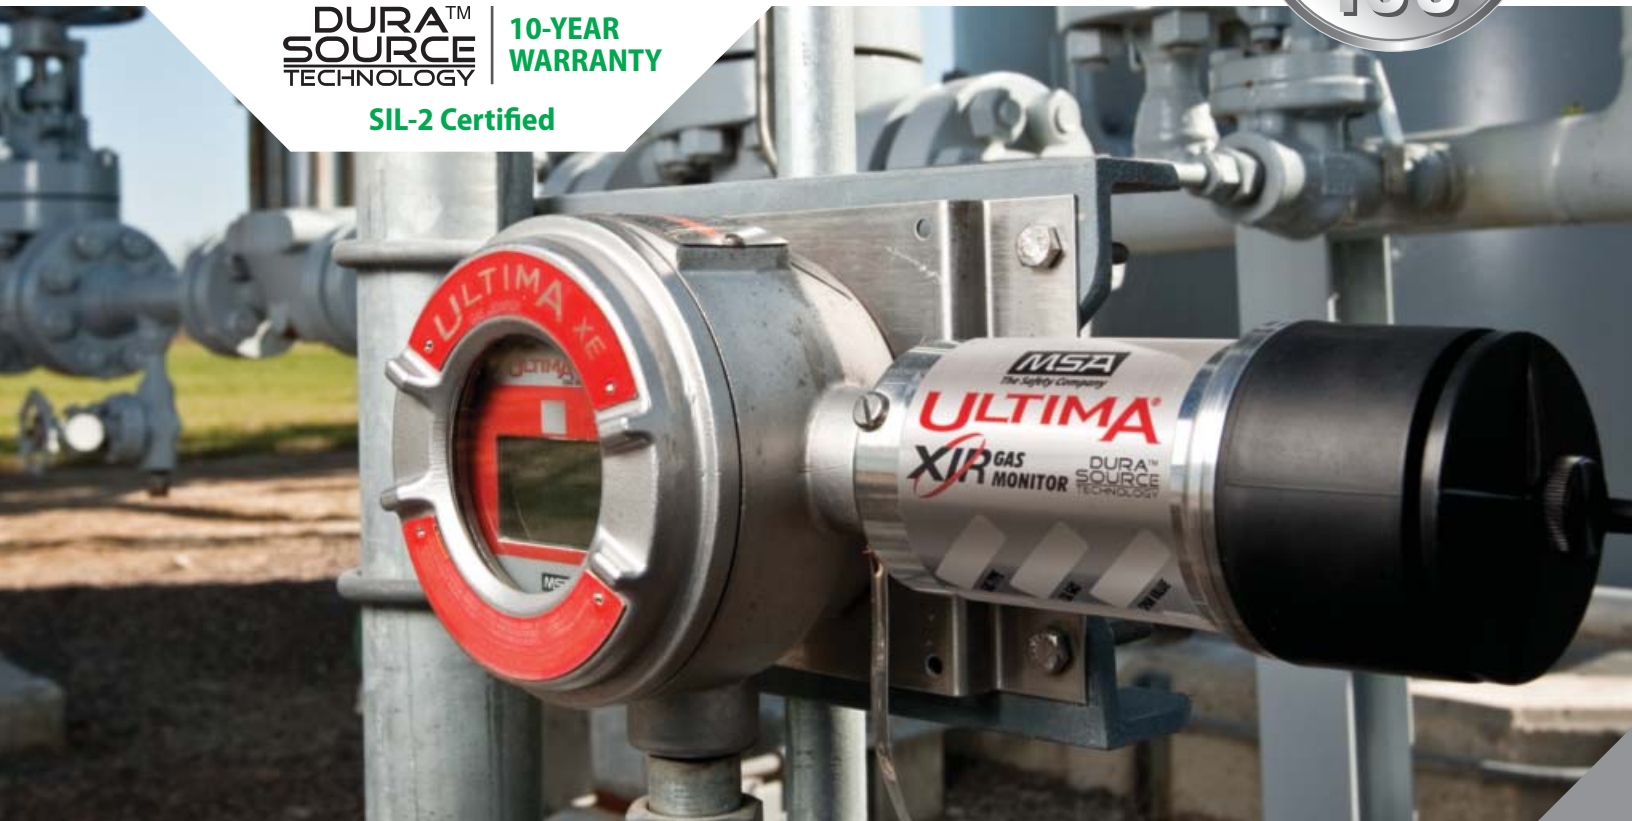

*The Ultima XIR Gas Monitor is a microprocessor-based, infrared point gas detector for continuous monitoring of combustible and carbon dioxide gases and vapors. Designed around a rugged, 316 stainless steel enclosure, the Ultima XIR Monitor has multiple entries for maximum flexibility.*



Ultima XIR Monitor operation is based upon dual-wavelength, heated-optics technology providing definitive compensation for temperature, humidity, and aging effects. IR technology offers excellent long-term stability, eliminates the need for frequent calibrations, and reduces overall cost of ownership.

- DuraSource Technology offers improved IR sensor life
- Field-selectable algorithms for a variety of hydrocarbon-based gases
- 4-20 mA, HART and Modbus (X<sup>3</sup> Technology) output
- No-gas calibration; zero adjustment meets requirement for full calibration
- Designed without sintered disk for optimum performance in harsh, offshore environments
- No sensor life reduction from gas exposure and operates in extended temperature ranges
- Fail-to-safety operation
- Immune to poisoning


*Because every life has a **purpose...***

## Principles of IR Technology

The Ultima XI Gas Monitor uses an electronically modulated infrared energy source and two detectors that convert infrared energy into electrical signals. Each detector is sensitive to a different range of wavelengths in the spectrum's infrared portion.

The source emission is directed through a main enclosure window into an open volume. A mirror at the end of this volume, protected by a second window, directs energy back through the main enclosure window and onto the detectors.

Gas presence in the open volume will reduce the source emission intensity reaching the analytical detector but not the source emission intensity reaching the reference detector. The microprocessor monitors the ratio of these two signals and correlates this ratio to a %LEL combustible reading.

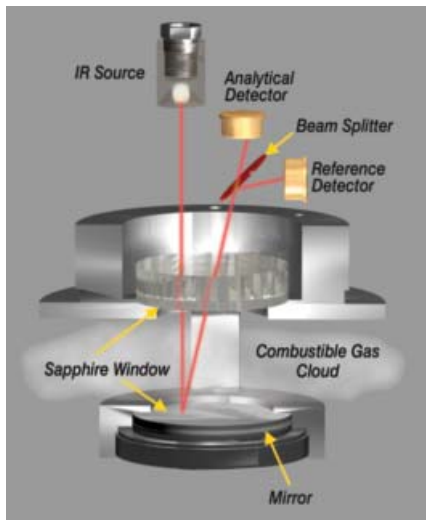

Specifications			
<b>GAS TYPES AND RANGES</b>	Combustible gases & vapors; 0-100% LEL CO <sub>2</sub> 0-5% and 0-2% by volume, 0-5000 ppm		
<b>TEMPERATURE RANGE</b>	-40°C to +60°C (-40°F to +140°F)		
<b>STABILITY</b>	± 2% full scale/year		
<b>REPEATABILITY</b>	± 2% full scale		
<b>ACCURACY</b>	<table border="0"> <tr> <td><b>Combustible</b> ± 2% full scale (≤ 50% LEL) ± 5% full scale (&gt; 50% LEL)</td> <td><b>CO<sub>2</sub></b> ± 3% full scale, 0-2%, 0-5% ranges ± 5% full scale, 0 - 0.5% range</td> </tr> </table>	<b>Combustible</b> ± 2% full scale (≤ 50% LEL) ± 5% full scale (> 50% LEL)	<b>CO<sub>2</sub></b> ± 3% full scale, 0-2%, 0-5% ranges ± 5% full scale, 0 - 0.5% range
<b>Combustible</b> ± 2% full scale (≤ 50% LEL) ± 5% full scale (> 50% LEL)	<b>CO<sub>2</sub></b> ± 3% full scale, 0-2%, 0-5% ranges ± 5% full scale, 0 - 0.5% range		
<b>RESPONSE TIMES</b>	<table border="0"> <tr> <td><b>Combustible</b> t90 &lt; 2 Sec —</td> <td><b>CO<sub>2</sub></b> t90 &lt; 6 Sec t50 &lt; 3 sec</td> </tr> </table>	<b>Combustible</b> t90 < 2 Sec —	<b>CO<sub>2</sub></b> t90 < 6 Sec t50 < 3 sec
<b>Combustible</b> t90 < 2 Sec —	<b>CO<sub>2</sub></b> t90 < 6 Sec t50 < 3 sec		
<b>HUMIDITY</b>	0%-95% RH, non-condensing		
<b>SENSOR WARRANTY</b>	10 years for IR source		
<b>POWER INPUT</b>	10-30 VDC, 5 watts		
<b>CURRENT DRAW</b>	290 mA maximum @ 24 VDC		
<b>WIRING REQUIREMENTS</b>	3-wire		
<b>SIGNAL OUTPUT</b>	4-20 mA 3-wire current source		
<b>CONDUIT ENTRIES</b>	One entry, 3/4" NPT (19.05 mm) with optional conduit		
<b>PHYSICAL WEIGHT DIMENSIONS</b>	316 stainless steel 6 lbs. (2.7 kg) 2.5" dia. x 8" long (64 x 203 mm)		
<b>APPROVAL RATINGS</b>	cFMus, cULus, CSA Class I, Div. 1 and 2, Groups A, B, C, & D Class II, Div. 1, Groups E, F, & G Class III ANSI/ISA 12.13.01 CSA C22.2 No. 152 Combustible Gas Performance, Class I, Div. 1 and Groups B, C, & D CE EMC Directive: 89/336/EEC CE ATEX Directive: 94/9/EC II 2G EEx d IIc T5 (Tamb -40°C to +60°C) TYPE 4X, IP 66 SIL 2 assessed to IEC 61508		



**Note:** This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 07-2054-MC / August 2014  
© MSA 2014 Printed in U.S.A.

**Corporate Center**  
1000 Cranberry Woods Drive,  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600  
[www.MSAsafety.com](http://www.MSAsafety.com)  
**U.S. Customer Service Center**  
Phone 1-800-MSA-INST  
Fax 1-800-967-0398  
**MSA Canada**  
Phone 1-800-672-2222  
Fax 1-800-967-0398

**MSA Mexico**  
Phone 01 800 672 7222  
Fax 52-44 2227 3943

**MSA International**  
Phone 724-776-8626  
Toll Free 1-800-672-7777  
Fax 724-741-1559  
Email [msa.international@msasafety.com](mailto:msa.international@msasafety.com)

**Offices and representatives worldwide**  
For further information:



Distributed by:  
**Amcontrol**  
1300 267 373  
[customerservice@amcontrolgroup.com](mailto:customerservice@amcontrolgroup.com)  
[amcontrolgroup.com](http://amcontrolgroup.com)